




Loft Shop Flat Glass PVC Rooflight

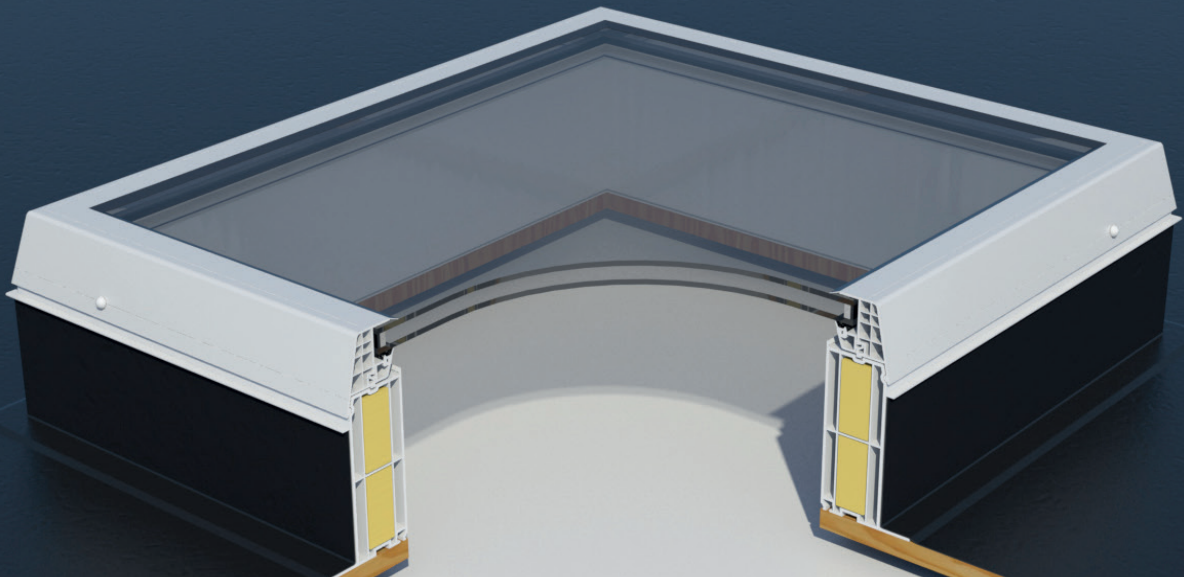

Loft Shop Flat Glass PVC is a standard specification modular glass rooflight, stocked in a wide range of sizes for next day delivery. It can be supplied as fixed, or manually or electrically opening for ventilation.

Flat Glass PVC Rooflight

Product Features:

- Clear glazing
- Double glazed Toughened/Laminated glass
- Carriage paid (no additional carriage charge)
- Can be installed to a builder's upstand or Raylux proprietary upstand
- 14 stocked sizes for next day delivery
- Combined Unit U-Value 1.26 W/m²K
- CWCT tested to Class 1

	Size Ref	Roof opening/daylight size (mm)	To fit external builder's upstand size (mm)
SQUARE	RX S2	500 x 500	600 x 600
	RX S4	600 x 600	700 x 700
	RX S5	700 x 700	800 x 800
	RX S7	800 x 800	900 x 900
	RX S8	900 x 900	1000 x 1000
	RX S9	1000 x 1000	1100 x 1100
	RX S11	1200 x 1200	1300 x 1300
RECTANGULAR	RX R5	600 x 900	700 x 1000
	RX R6	600 x 1200	700 x 1300
	RX R7	700 x 1000	800 x 1100
	RX R16	900 x 1200	1000 x 1300
	RX R17a	1000 x 1500	1100 x 1600
	RX R19	1000 x 2000	1100 x 2100
	RX R23c	1200 x 2200	1300 x 2300

Prices

	Size Ref	Daylight Size (mm)	Fixed glass to suit builder's upstand (£)	Glass with upstand (£)	Manual opening to suit builder's upstand (£)	Manual opening with upstand (£)	Electric opening to suit builder's upstand (£)	Electric opening with upstand (£)
SQUARE	RX S2	500 x 500	331	389	501	560	610	651
	RX S4	600 x 600	349	416	579	654	679	733
	RX S5	700 x 700	379	452	599	680	689	749
	RX S7	800 x 800	396	468	604	685	707	770
	RX S8	900 x 900	462	545	677	768	781	853
	RX S9	1000 x 1000	499	605	711	826	843	928
	RX S11	1200 x 1200	646	750	848	960	994	1088
RECTANGULAR	RX R5	600 x 900	376	447	610	693	697	758
	RX R6	600 x 1200	453	539	660	753	774	849
	RX R7	700 x 1000	432	513	632	720	752	822
	RX R16	900 x 1200	537	651	729	847	867	972
	RX R17a	1000 x 1500	672	780	838	949	1021	1118
	RX R19	1000 x 2000	989	1143	1292	1459	1742	1876
	RX R23c	1200 x 2200	1118	1182	1453	1523	1872	1926

Flat Glass PVC Rooflight

Options:


- Fixed glass unit only (to fit to a builder's upstand)
- Fixed glass unit with 150mm vertical upstand
- Manual opening glass unit only (to fit to a builder's upstand)
- Manual opening glass unit with 150mm vertical upstand
- Electric opening glass unit only (to fit to builder's upstand)
- Electric opening glass unit with 150mm vertical upstand



Fixed to fit to builder's upstand




Fixed with 150mm vertical upstand

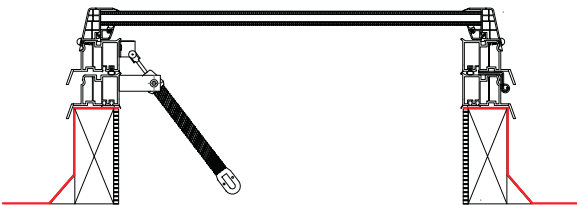

Manual opening to fit to builder's upstand



Manual opening with 150mm vertical upstand

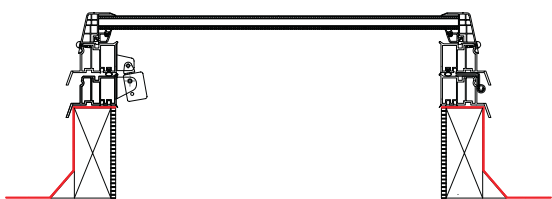

Electric opening to fit to builder's upstand



Electric opening with 150mm vertical upstand